


# DeckerSealing<sup>TM</sup> SGBTH Series


Compact Servo Booster Pump

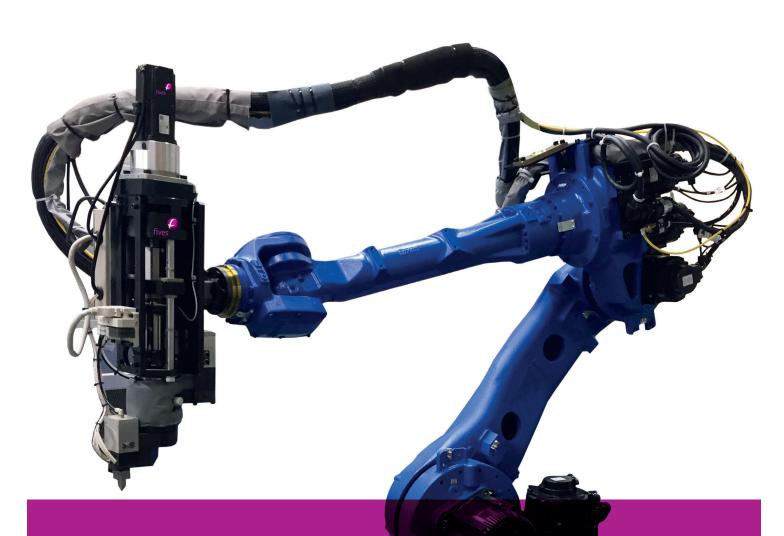


Embedded High Accuracy Booster Pump

- Servo motor controlled metering for sealant bead, stich or spot application
- Simple, compact and high performance system
- Precise, reliable and easy maintenance

## High Performance Compact DeckerSealing<sup>TM</sup> Booster Pump

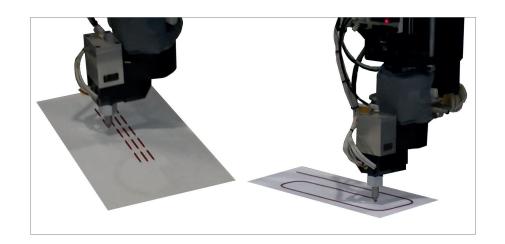



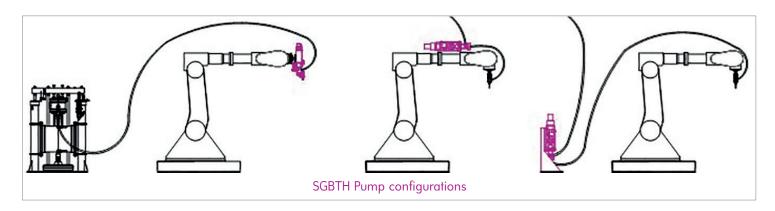

#### **SPECIFICATION**

Product Type	SGBTH 10	SGBTH 40	SGBTH 60	SGBTH 100	SGBTH 250
Max Pressure (MPa)	7	7	7	7	15
Capacity (cc)	12	40	60	100	250
Max Flow Rate (I/min)	0.24	0.24	0.24	0.9	1.8
Motor Capacity (W)	400	200	200	200	400
Outlet size (PT)	3/8"	3/8"	3/8"	3/8"	1/2"
Weight (kg)	25	20	25	35	90

#### OPTION

Accessories	Heating system, Pressure sensor, High pressure 20 MPa option	N
High Pressure	Ball screw adapted to 20 MPa	Fives

### **APPLICATION**

Material	Butyl, Epoxy, Grease, Mastic, Silicone, Urethane	

The information provided on this document is for information purposes only and does not constitute a legal obligation or a warranty, express or implied, of any kind.

